

PXM-BT Family



**BATTERY POWERED
PORTABLE GENERATOR**

**PXM-20BT, PXM-40BT
CORDLESS TYPE OF PORTABLE**



BATTERY POWERED PORTABLE GENERATOR

PXM-20BT, PXM-40BT CORDLESS TYPE OF PORTABLE



PXM-20 BT and PXM-40BT are the most compact and lightweight battery-powered, cordless, **portable X-ray** units in the medical market today. Utilizing revolutionary micro technology and a powerful **Lithium-Ion Battery**, the **PXM-BT Family of portables** deliver an exposure capacity of up to 3000 mAs without the need for recharging the battery. No external power source is required to produce the precise radiographic images.

PXM-BT battery generators are designed with state-of-the-Art Microprocessor Controls and PROM memory for preset APR programming, battery-status readouts and mAs energy-level displays including the collimator lamp program. The **Radio Frequency (RF) transmitter & receiver** connects the DR-image PC and the PXM-BT unit without the need for interconnecting cables. Therefore, the PXM-BT portable is totally free from power cords and DR interface cables.

The **Lithium-Ion battery** is rechargeable and has a very long lifecycle (of over 5 years) without losing power efficiency. This battery is completely free from routine maintenance. Recharging time is approximately 2-3 hours, which is much shorter than conventional batteries. A battery charger (50 or 60 watt) is a standard accessory, but cigarette-lighter chargers for vehicles and solar-energy chargers are offered as an optional items.



FEATURES

- ▶ Rechargeable battery : Lithium-Ion
- ▶ High energy battery : 3000 mAs
- ▶ Higher output : 20-60 mA / 100 kV
- ▶ Number of Exp. per full charge : 300 -500
- ▶ Highly efficient, long-life battery : over 5 yrs
- ▶ Free from battery maintenance
- ▶ Free from power cords & other interface cables.
- ▶ RF wireless control for DR exposure (optional)
- ▶ Rapid exp. program for DR users
- ▶ 21 selections of APR programs
- ▶ Auto. collimator lamp & dual laser programs
- ▶ Battery charger with overcharge-protection
- ▶ Battery energy level indicator & % display
- ▶ mAs energy status display
- ▶ Compact, slim design and lightweight
- ▶ Charger power : 110 / 220 VAC auto switching




▲ FREE FROM INTERCONNECTING CABLES:
NOT NEEDED FOR POWER CABLES OR DR SYNC CABLES



- ▶ LITHIUM-ION BATTERY
- ▶ BATTERY CHARGER
- ▶ EXPOSURE HAND SWITCH

WIRELESS DIGITAL RADIOGRAPHY(DR) INTERFACE :

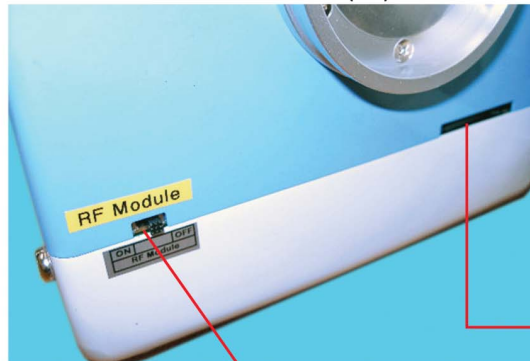

- ▶ RF TRANSMITTER FOR DR EXPOSURE SYNC.
- ▶ RF SIGNAL TRANSMITTER ON/OFF SWITCH FOR WIRELESS DR EXPOSURE SYNC.





PXM-BT FAMILY

ELECTRICAL SPECIFICATION AND COMPARISON CHART



DESCRIPTION	PXM-20BT	PXM-40BT
Generator Type	Battery Powered HF generator Micro-processor Controller	Battery Powered HF generator Micro-processor Controller
Inverter Output (KW)	1.6 KW, 20mA @ 80 kV	2.4 KW, 30mA @ 80 kV
KV Range	40-100 KV, 1 KV increment	40-100 KV, 1 KV increment
mA Range	12 to 20 mA, Variable	16 to 35 mA, Variable
mAs Range	0.4-50 mAs, 32 selections	0.4 -100 mAs, 35 selections.
Console & Display	KV & mAs LED Display Ready & Exp. LED indicator Collimator & Laser SW Preset technique SW Reversible LED readout SW	KV & mAs LED Display Ready & Exp. LED indicator Collimator & Laser SW Preset technique SW Reversible LED readout SW
Controller Software	PROM memory :15 APR selector Remote Control program Programmable Laser beam & Collimator lamp Battery Charger LCD Indicator Stand-By mode & Dimmer	PROM memory :21 APR selector Remote Control program Programmable Laser beam & Collimator lamp Battery Charger LCD Indicator Stand-By mode & Dimmer
X-Ray Tube	Fixed Anode type Focal Size : 1.2 mm Anode Heat Capacity: 20 KHU	Fixed Anode type Focal Size : 1.2 mm Anode Heat Capacity: 20 KHU
Battery Features	Rechargeable Lithium-Ion Type Capacity : 1,600 mAs Charger : 55 Watt / 110 VAC Charging time: 3.5 hrs Power requirement: 29.4 V / 1.5 A	Rechargeable Lithium-Ion Type Capacity : 3,200 mAs Charger : 110 Watt / 110 VAC Charging time: 3.5 hrs Power requirement: 58.8 V / 1.5 A
Dual Laser	Programmable controller 26" Auto focal point by Dual Laser	Programmable controller 26" Auto focal point by Dual Laser
Laser Collimator	Manual : collimator 4 blades Programmable 10 sec. timer	Manual : collimator 4 blades Programmable 10 sec. timer
Auto Compensation	Battery voltage comp. \pm 10 %	Battery voltage comp. \pm 10 %
Charger Power Requirement	Auto Switch, 110/220 AC , 50/ 60 Hz	Auto Switch, 110/220 AC , 50/ 60 Hz
Net Weight	9.8 Kg (21.6 lbs)	14.0Kg (30.9 lbs)
Size	34x22x17 cm (13.6 x 9.0 x 6.8 inches)	25x23x20 cm (14 x 9.3 x8.0 inches)

All specifications are subject to change without notice

DIMENSIONS : (Unit mm)

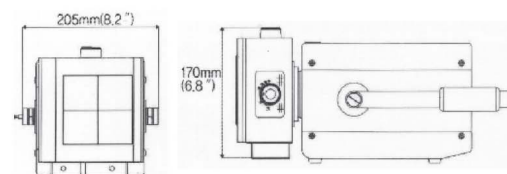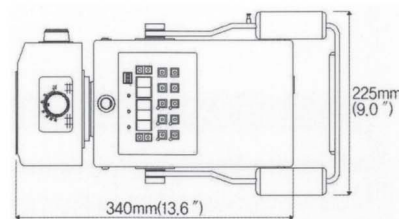

PXM-20BT

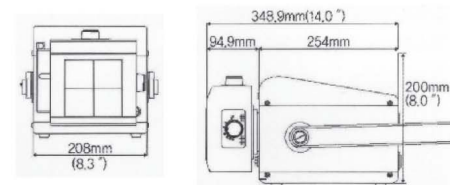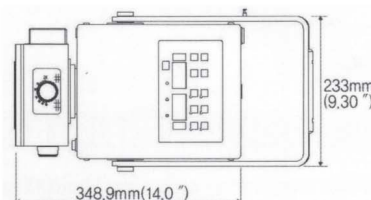

PXM-40BT

BATTERY CAPACITY & X-RAY EXPOSURE DATA

mAs Technique Setting		1.0 mAs	2.0 mAs	3.0 mAs	5.0 mAs	10.0 mAs
No. of Exp	Collimator On Laser Beam On	379	306	257	195	121
No. of Exp	Collimator Off Laser Beam On	497	554	411	272	147

PXM-20 BT : Battery fully charged

mAs Technique Setting		1.0 mAs	2.0 mAs	3.0 mAs	5.0 mAs	10.0 mAs
No. of Exp	Collimator On Laser Beam On	504	456	416	355	259
No. of Exp	Collimator Off Laser Beam On	1564	1247	990	701	405

PXM-40 BT : Battery fully charged

Distributor



UNITED RADIOLOGY SYSTEMS

Affiliated with POSKOM America, Inc.

151 S. Pfungsten Rd., Unit T. Deerfield, IL 60015 U.S.A.

Tel. (847)291-0999 Fax. (847)291-1090

e-mail: sales@united-radiology.com

Website: www.united-radiology.com